


# Laboratory Refrigerator(2-8°C)



# Laboratory Refrigerator

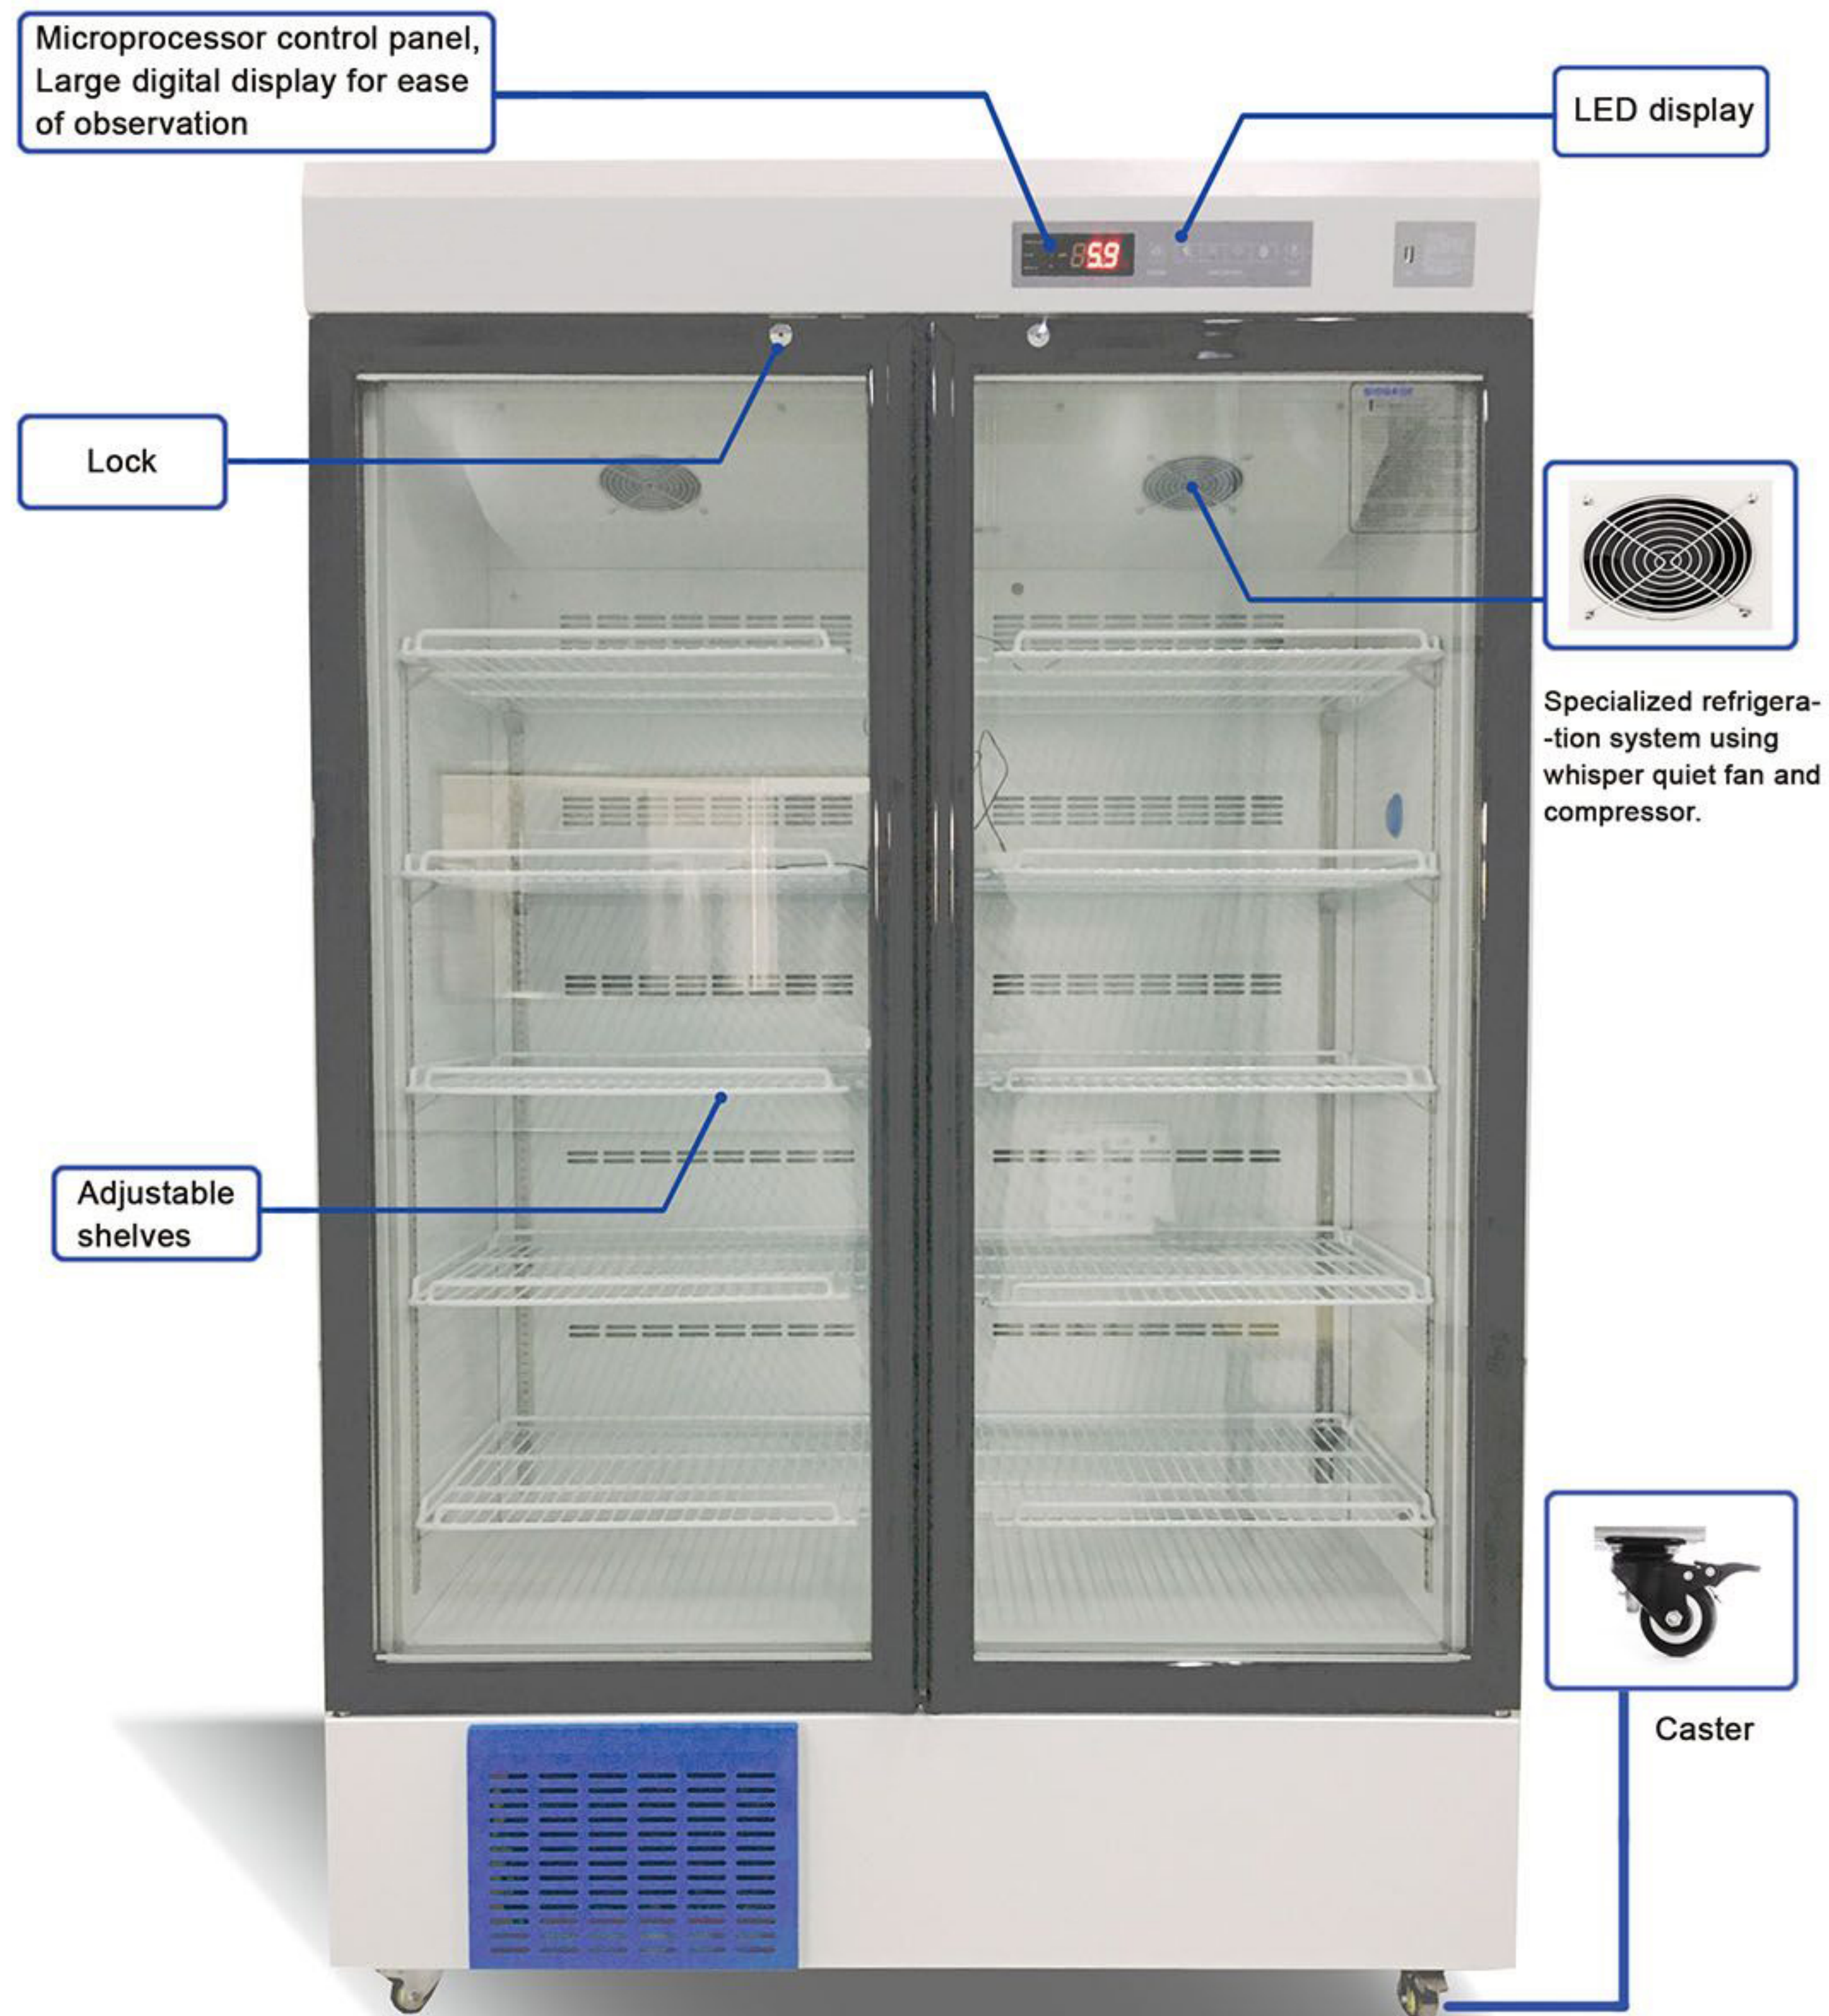

## Technical Parameters

Model	BPR-5V160	BPR-5V250	BPR-5V310	BPR-5V588	BPR-5V1000
External Size(W*D*H) mm	500*550*1300	580*575*1810	620*575*1980	1220*630*1885	1220*860*1885
Capacity	130L	250L	310L	656L	1000L
Temp. Range	2°C~8°C				
Temp. Accuracy	0.1°C				
Control System	Microprocessor Control, Large Screen LED Display				
Alarm	Audible and visual alarm for: High and low temperature, Power failure alarm, Sensor failure, Door ajar				
Refrigeration Type	Forced air refrigeration system				
Refrigerant	R600a, CFC Free			R134a, CFC Free	
Condenser & Evaporator	Bundy tube condenser				
Defrost	Auto defrost				
Construction	Structure: Unibody Design & Mono-assembly foaming (Rigid polyurethane insulation material)				
	Internal Material: Embossed aluminum sheet			Cold-rolled steel coated with anti-bacteria powder	
	External Material: Cold-rolled steel coated with anti-bacteria powder				
Shelves	4 pcs	4pcs	5 pcs	10 pcs	
Door	Glass door with electric heating				
Consumption	136W	170W	180W	560W	
Power Supply	AC110/220V±10%, 50/60Hz				
Standard Accessories	LED Lamp, shelves, door keys, USB port, probe access port(BPR-5V588 & BPR-5V1000)				
Optional Accessory	Temperature recorder				
Package Size(W*D*H) mm	590*595*1380	670*650*1870	700*650*2030	1340*750*2100	1340*980*2100
Gross Weight	51kg	68kg	84kg	248kg	280kg